

Dishwasher safe



Fruitbasket, rotation plate, screw, fruitcompartment, supply tunnel



Upper (2x) / lower (2x) pressing elements, pressing system screw (4x)



Right / left peel remover



SCS knife + knife guide



Frontcover nut (3x)



Fruit sieve support, fruit sieve, fixation screw fruit sieve support, ATS system



SB-tap



Right / left peel bucket



# BRIEF CLEANING INSTRUCTION



at least  
1x /day or  
as required




orange size





Choose correct size of oranges:

65 - 80 mm  
2,5 - 3,1 inch  
100-140 count box  
by using the calibrator!

Handwash only



Frontcover incl. side chutes right / left

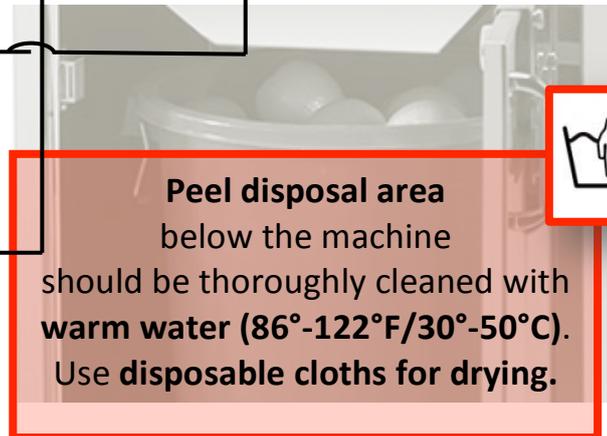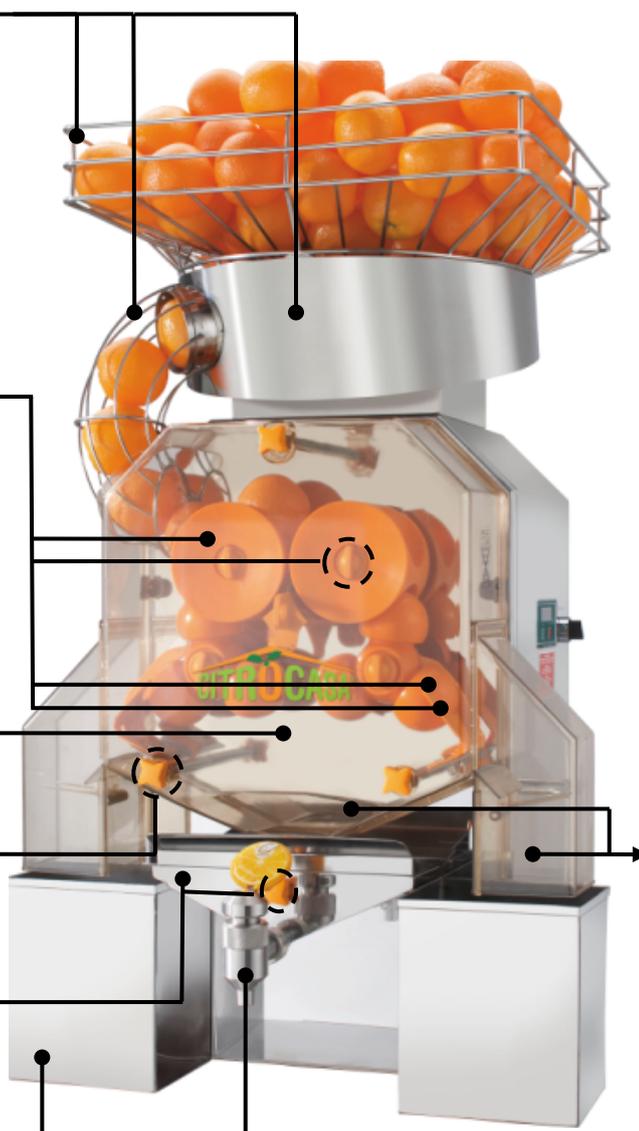

Peel disposal area below the machine should be thoroughly cleaned with warm water (86°-122°F/30°-50°C). Use disposable cloths for drying.

Please read user manual carefully before operating machine!

I. **IMPORTANT: Turn off and unplug the machine BEFORE cleaning!**

II. **Empty fruit basket:**

Ensure that no oranges remain in the supply tunnel or beside pressing elements.

III. **Remove and clean machine parts according to below order:**

1. Fruit basket



2. Rotation plate incl. screw rotation plate



3. Fruit compartment (for cleaning only. Do not remove)



4. Frontcover nut (3x)



5. Frontcover (incl. side chutes right / left)

**IMPORTANT: Do not clean frontcover in the dishwasher! Handwash only!**



6. Supply tunnel



7. Peel remover (left / right)



8. Pressing system screw (4x)



9. Pressing elements (2x upper / 2x lower)



10. Pressing system screw (knife)



11. SCS-knife incl. knife guide




**CAUTION: BLADE IS RAZOR SHARP! HANDLE CAREFULLY -Risk of injury - sharp knife!**

12. ATS-system and fruit sieve



13. Fixation nut fruit sieve support and fruit sieve support




14. SB-tap (Stainless steel):

**IMPORTANT: Clean all parts of the SB-tap thoroughly with dish liquid.**



15. According to machine model: Peel buckets (left / right) and

peel disposal area below the machine (cabinet or countertop installation kit)



**All machine parts, the pressing area of the machine housing as well as the peel disposal area below the machine should be cleaned thoroughly with warm water (86°-122°F/30°-50°C) and dried with disposable cloths.**

IV. Assemble machine in reverse order. Ensure that **all blade and pressing system screws are tightened properly when assembling** the machine!